
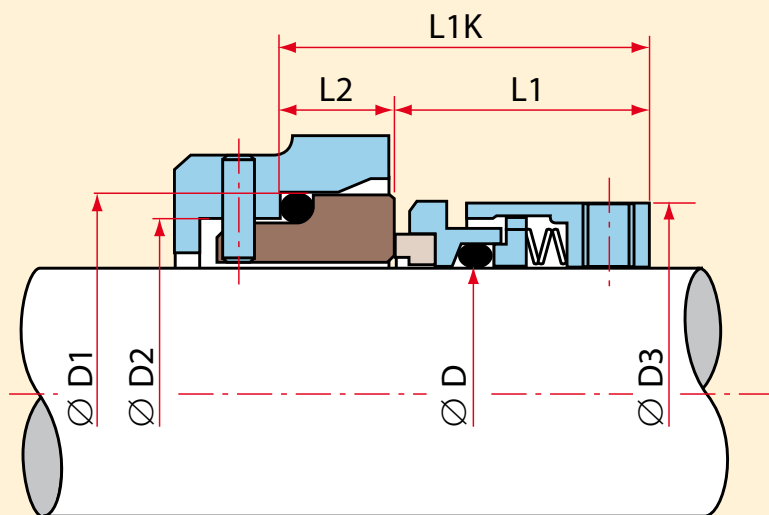


POWER[®] *seal* 1677

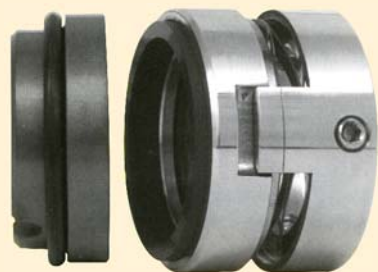

Rozsah použití

Teplota: -100 °C ~ +200 °C

Tlak: 14 bar

Rychlost: 25 m/sec

Materiálové složení

Rotační plocha: CA / SC / SiC

Stacionární plocha: SC / SiC

O-kroužky: EPDM / Viton / FEP / Kalrez

průměr hřídele D	D1	D2	D3	L1	L2	L1K
14	25.00	21.00	24.00	25.00	10.00	35.00
16	27.00	23.00	26.00	25.00	10.00	35.00
18	33.00	27.00	32.00	26.00	11.50	37.50
20	35.00	29.00	34.00	26.00	11.50	37.50
22	37.00	31.00	36.00	26.00	11.50	37.50
24	39.00	33.00	38.00	28.50	11.50	40.00
25	40.00	34.00	39.00	28.50	11.50	40.00
28	43.00	37.00	42.00	31.00	11.50	42.50
30	45.00	39.00	44.00	31.00	11.50	42.50
32	48.00	42.00	46.00	31.00	11.50	42.50
33	48.00	42.00	47.00	31.00	11.50	42.50
35	50.00	44.00	49.00	31.00	11.50	42.50
38	56.00	49.00	54.00	31.00	14.00	45.00
40	58.00	51.00	56.00	31.00	14.00	45.00
43	61.00	54.00	59.00	31.00	14.00	45.00
45	63.00	56.00	61.00	31.00	14.00	45.00
48	66.00	59.00	64.00	31.00	14.00	45.00
50	70.00	62.00	66.00	32.50	15.00	47.50
53	73.00	65.00	69.00	32.50	15.00	47.50
55	75.00	67.00	71.00	32.50	15.00	47.50
58	78.00	70.00	78.00	37.50	15.00	52.50
60	80.00	72.00	80.00	37.50	15.00	52.50
63	83.00	75.00	83.00	37.50	15.00	52.50
65	85.00	77.00	85.00	37.50	15.00	52.50
68	90.00	81.00	88.00	34.50	18.00	52.50
70	92.00	83.00	90.00	42.00	18.00	60.00
75	97.00	88.00	99.00	42.00	18.00	60.00
80	105.00	95.00	104.00	41.80	18.20	60.00
85	110.00	100.00	109.00	41.80	18.20	60.00
90	115.00	105.00	114.00	46.80	18.20	65.00
95	120.00	110.00	119.00	47.80	17.20	65.00
100	125.00	115.00	124.00	47.80	17.20	65.00