


POWER[®] seal 13

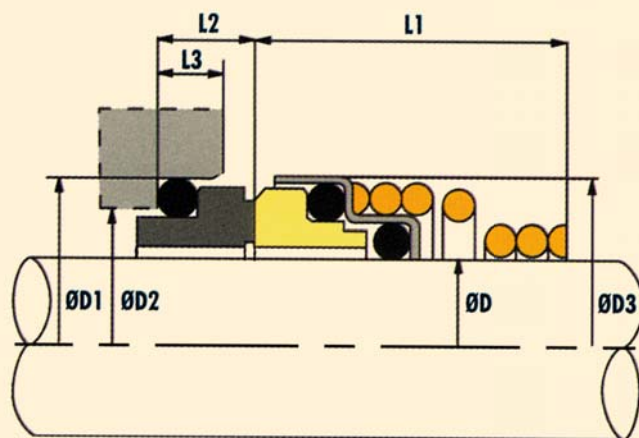

Rozsah použití

Teplota:	-40 °C ~ +180 °C
Tlak:	140 psi
Rychlost:	15 m/sec

Materiálové složení

Rotační plocha:	Ceramic, Silicon Carbide, Tungsten Carbide, Carbon
Stacionární plocha:	Carbon, Silicon Carbide, Tungsten Carbide, Ceramic
Ostatní materiály na vyžádání.	

Ø hřídele D mm	D1	D2	D3	L1	L2	L3
10	18.10	14.00	19.50	15.00	5.50	4.00
11	20.60	16.50	22.00	18.00	5.50	4.00
12	20.60	16.50	22.00	18.00	5.50	4.00
13	23.10	19.00	24.00	22.00	6.00	4.00
14	23.10	19.00	24.00	22.00	6.00	4.00
15	26.90	21.00	26.00	22.00	7.00	5.00
16	26.90	21.00	26.00	23.00	7.00	5.00
17	26.90	21.00	26.00	23.00	7.00	5.00
18	30.90	25.00	32.00	24.00	8.00	5.00
19	30.90	25.00	32.70	25.00	8.00	5.00
20	30.90	25.00	32.70	25.00	8.00	5.00
21	35.40	30.00	36.00	25.00	8.00	5.50
22	35.40	30.00	36.00	25.00	8.00	5.50
23	35.40	30.00	36.00	27.00	8.00	5.50
24	35.40	30.00	37.40	27.00	8.00	5.50
25	38.20	33.00	38.00	27.00	8.50	5.50
28	43.30	38.00	42.00	29.00	9.00	5.50
29	43.30	38.00	44.00	30.00	9.00	5.50
30	43.30	38.00	44.00	30.00	9.00	5.50
32	43.30	38.00	45.50	30.00	9.00	5.50
33	53.50	45.00	46.50	39.00	11.50	7.50
35	53.50	45.00	49.00	39.00	11.50	7.50
38	60.50	52.00	56.00	39.00	11.50	7.50
40	60.50	52.00	58.00	39.00	11.50	7.50