


POWER[®] seal 14

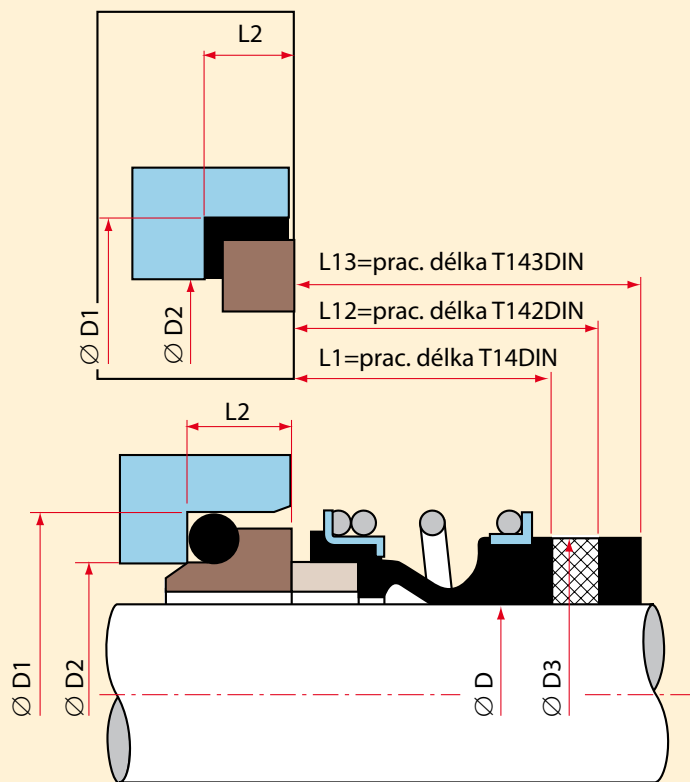

Ø hřídele D mm	D1	D2	D3	L1	L12	L13	L2
10	21.0	17.0	20.0	13.4	25.9	33.4	6.6
12	23.0	19.0	22.0	14.4	25.9	33.4	6.6
14	25.0	21.0	24.0	14.4	28.4	33.4	6.6
15	27.0	23.0	25.0	14.4	28.4	33.4	6.6
16	27.0	23.0	26.0	14.4	28.4	33.4	6.6
18	33.0	27.0	32.0	18.5	30.0	37.5	7.5
20	35.0	29.0	34.0	18.5	30.0	37.5	7.5
22	37.0	31.0	36.0	18.5	30.0	37.5	7.5
24	39.0	33.0	38.0	18.5	32.5	42.5	7.5
25	40.0	34.0	39.0	18.5	32.5	42.5	7.5
28	43.0	37.0	42.0	24.5	35.0	42.5	7.5
30	45.0	39.0	44.0	25.5	35.0	42.5	7.5
32	48.0	42.0	46.0	25.5	35.0	47.5	7.5
33	48.0	42.0	47.0	25.5	35.0	47.5	7.5
35	50.0	44.0	49.0	26.5	35.0	47.5	7.5
38	56.0	49.0	54.0	29.0	36.0	46.0	9.0
40	58.0	51.0	56.0	29.0	36.0	46.0	9.0
43	61.0	54.0	59.0	29.0	36.0	51.0	9.0
45	63.0	56.0	61.0	29.0	36.0	51.0	9.0
48	66.0	59.0	64.0	31.0	36.0	51.0	9.0
50	70.0	62.0	66.0	30.5	38.0	50.5	9.5
53	73.0	65.0	69.0	29.0	36.5	59.0	11.0
55	75.0	67.0	71.0	29.0	36.5	59.0	11.0
58	78.0	70.0	78.0	32.0	41.5	59.0	11.0
60	80.0	72.0	80.0	34.0	41.5	59.0	11.0
65	85.0	77.0	85.0	34.0	41.5	69.0	11.0
68	90.0	81.0	88.0	33.7	41.2	68.7	11.3
70	92.0	83.0	90.0	33.7	48.7	68.7	11.3
75	97.0	88.0	99.0	40.7	48.7	68.7	11.3
80	105.0	95.0	104.0	40.5	48.0	78.0	12.0
85	110.0	100.0	109.0	38.5	46.0	76.0	14.0
90	115.0	105.0	114.0	38.5	51.0	76.0	14.0
95	120.0	110.0	119.0	38.5	51.0	76.0	14.0
100	125.0	115.0	124.0	38.5	51.0	76.0	14.0

Rozsah použití

Teplota:	-40 °C ~ +200 °C
Tlak:	12 bar
Rychlost:	15 m/sec

Materiálové složení

Rotací plocha:	CA / SC / SiC / TC
Stacionární plocha:	CE / SC / SiC / TC
Elastomery:	EPDM / Viton / NBR