


POWER[®] *seal* 1520

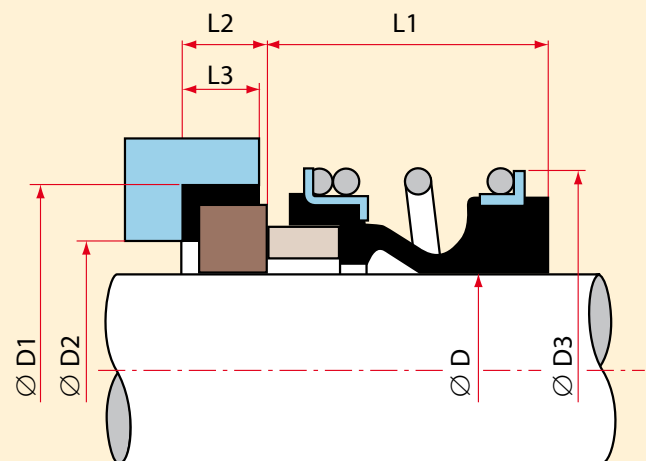

Rozsah použití

Teplota:	-40 °C ~ +180 °C
Tlak:	10 bar
Rychlost:	15 m/sec

Materiálové složení

Rotační plocha:	CA / SC / SiC / TC
Stacionární plocha:	CE / SC / SiC / TC
Elastomery:	EPDM / Viton / NBR

Ø hřídele D mm	D1	D2	D3	L1	L2	L3
10	24.60	16.00	20.00	25.40	8.74	7.47
12	27.79	19.05	22.00	25.40	8.74	7.47
13	27.79	19.05	22.00	25.40	8.74	7.47
14	30.95	22.23	24.00	25.40	10.32	8.97
15	30.95	22.23	25.00	25.40	10.32	8.97
16	30.95	22.23	26.00	25.40	10.32	8.97
18	34.15	25.40	32.00	25.40	10.32	8.97
19	34.15	25.40	32.00	25.40	10.32	8.97
20	35.70	26.99	34.00	25.40	10.32	8.97
22	37.30	28.58	36.00	25.40	10.32	8.97
24	40.50	31.75	38.00	25.40	10.32	8.97
25	40.50	31.75	39.00	25.40	10.32	8.97
28	47.63	35.72	42.00	33.34	11.99	10.46
30	50.80	38.89	44.00	33.34	11.99	10.46
32	50.80	38.89	46.00	33.34	11.99	10.46
33	53.98	42.07	47.00	33.34	11.99	10.46
34	53.98	42.07	49.00	33.34	11.99	10.46
35	53.98	42.07	49.00	33.34	11.99	10.46
38	57.15	45.24	54.00	33.34	11.99	10.46
40	60.35	48.82	56.00	33.34	11.99	10.46
42	63.50	51.59	59.00	40.48	11.99	10.46
43	63.50	51.59	59.00	40.48	11.99	10.46
44	63.50	51.59	61.00	40.48	11.99	10.46
45	63.50	51.59	61.00	40.48	11.99	10.46
48	66.70	54.75	64.00	40.48	11.99	10.46
50	69.85	58.00	66.00	40.48	13.50	11.96
53	73.05	62.00	69.00	41.00	13.50	11.96
55	76.20	65.00	71.00	41.00	13.50	11.96
58	79.40	68.00	78.00	41.00	13.50	11.96
60	79.40	68.00	80.00	41.00	13.50	11.96
63	82.55	71.20	83.00	41.00	13.50	11.96
65	92.10	78.35	85.00	49.00	15.90	14.50
70	95.25	81.10	90.00	49.00	15.90	14.50
73	98.45	84.50	96.00	49.00	15.90	14.50
75	101.65	88.10	99.00	49.00	15.90	14.50
80	114.30	97.00	104.00	56.00	20.00	18.50
85	117.50	100.00	109.00	56.00	20.00	18.50
90	123.85	107.00	114.00	59.00	20.00	18.50
95	127.00	110.00	119.00	59.00	20.00	18.50
100	133.35	116.00	124.00	62.00	20.00	18.50