
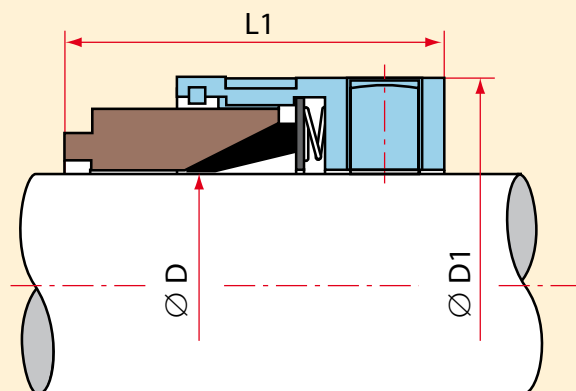


# POWER<sup>®</sup> *seal* 1609



## Rozsah použití

Teplota: -100 °C ~ +200 °C

Tlak: 14 bar

Rychlost: 25 m/sec

## Materiálové složení

Rotační plocha: CA / SC

PTFE klín

Ø hřídele D Inch	Ø hřídele D mm	D1	L1
0.625		30.70	19.00
0.750		34.70	22.20
	20	35.70	24.00
	22	37.00	24.00
0.875		38.00	23.80
	24	39.50	25.00
	25	40.50	25.00
1.000		40.50	25.40
	28	44.00	27.00
1.125		43.50	27.00
	30	47.00	27.00
1.250		48.30	27.00
	32	50.20	29.00
1.375		52.00	28.60
	35	52.00	29.00
	38	55.60	29.00
1.500		55.60	28.60
	40	59.70	35.00
1.625		61.00	35.00
1.750		64.30	35.00
	45	64.90	35.00
1.875		65.10	35.00
	48	65.10	35.00
2.000	50	69.70	35.00
2.125		77.00	43.00
	55	78.00	43.00

Ø hřídele D Inch	Ø hřídele D mm	D1	L1
2.250		79.90	43.00
2.375	60	83.10	43.00
2.500		86.60	43.00
	65	88.20	43.00
2.625		89.60	43.00
2.750		92.80	43.00
	70	92.80	43.00
2.875	73	95.50	43.00
	75	96.20	43.00
3.000		97.70	43.00
3.125		100.50	43.00
	80	101.00	43.00
3.250		105.30	43.00
	85	107.50	43.00
3.375		108.30	43.00
3.500		111.50	43.00
	90	112.50	43.00
3.625		114.90	43.00
	95	117.50	43.00
3.750		118.00	43.00
3.875		121.20	43.00
	100	122.50	43.00
4.000		124.60	43.00
5.000		159.00	51.00
5.500		172.00	51.00