
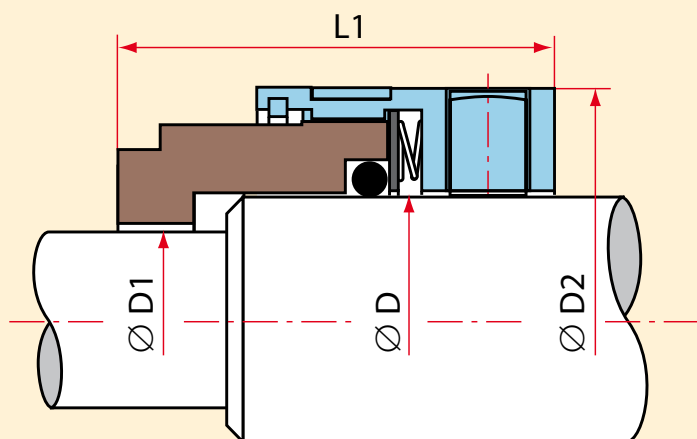


POWER[®] *seal* 1609B



Rozsah použití

Teplota:	-100 °C ~ +200 °C
Tlak:	21 bar
Rychlost:	25 m/sec

Materiálové složení

Rotační plocha:	CA / SC
O-kroužky:	EPDM / Viton / FEP / Kalrez

Ø hřídele D Inch	D1	D2	L1
0.625	12.70	30.70	27.00
0.750	15.80	34.70	30.00
0.875	19.10	38.00	32.00
1.000	22.20	40.50	33.00
1.125	25.40	43.50	35.00
1.250	28.60	48.30	35.00
1.375	28.60	52.00	37.00
1.500	31.80	55.60	37.00
1.625	34.90	61.00	45.00
1.750	38.10	64.30	45.00
1.875	41.30	65.10	45.00
2.000	44.50	69.70	45.00
2.125	47.60	77.00	52.00
2.250	50.80	79.90	52.00
2.375	54.00	83.10	52.00
2.500	57.20	86.60	52.00
2.625	60.30	89.60	52.00
2.750	63.50	92.80	52.00
2.875	66.70	95.50	52.00
3.000	69.90	97.70	52.00
3.125	73.00	100.50	52.00
3.250	76.20	105.30	52.00
3.375	79.40	108.30	52.00
3.500	82.60	111.50	52.00
3.625	85.70	114.90	52.00
3.750	88.90	118.00	52.00
3.875	92.10	121.20	52.00
4.000	95.30	124.60	52.00