


POWER[®] seal 1678

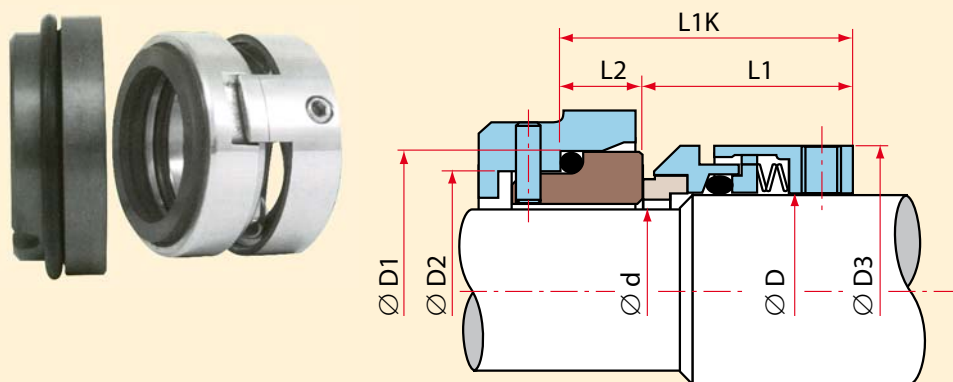

Ø hřídele D mm	d	D1	D2	D3	L1	L2	L1K
18	14	25.0	21.0	32.0	32.5	10.0	42.5
20	16	27.0	23.0	34.0	32.5	10.0	42.5
22	18	33.0	27.0	36.0	33.5	11.5	45.0
24	20	35.0	29.0	38.0	33.5	11.5	45.0
28	24	39.0	33.0	42.0	36.0	11.5	47.5
30	25	40.0	34.0	44.0	36.0	11.5	47.5
33	28	43.0	37.0	47.0	38.5	11.5	50.0
35	30	45.0	39.0	49.0	38.5	11.5	50.0
38	33	48.0	42.0	54.0	38.5	11.5	50.0
40	35	50.0	44.0	56.0	38.5	11.5	50.0
43	38	56.0	49.0	59.0	38.5	14.0	52.5
45	40	58.0	51.0	61.0	38.5	14.0	52.5
50	45	63.0	56.0	66.0	38.5	14.0	52.5
53	48	66.0	59.0	69.0	38.5	14.0	52.5
55	50	70.0	62.0	71.0	42.5	15.0	57.5
60	55	75.0	67.0	80.0	42.5	15.0	57.5


Rozsah použití

Teplota:	-40 °C ~ +180 °C
Tlak:	17 bar
Rychlost:	20 m/sec

Materiálové složení

Rotační plocha:	CA / SC / SiC
Stacionární plocha:	SC / SiC
O-kroužky:	EPDM / Viton / FEP / Kalrez

POWER[®] seal 1682

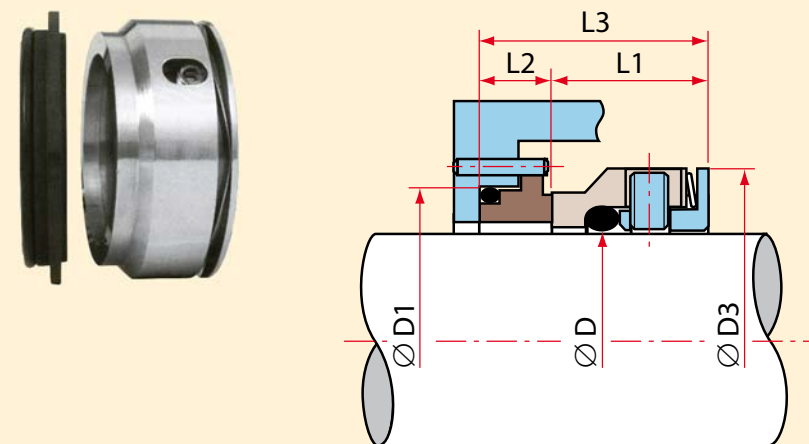

Ø hřídele D mm	D1	D3	L1	L2	L3
20	30.00	32.40	20.00	10.50	30.50
30	41.30	44.00	21.40	11.10	32.50
35	46.95	50.80	22.00	12.00	34.00
45	58.26	62.40	22.90	12.60	35.50
55	69.55	76.00	29.30	13.20	42.50
75	92.15	99.20	31.10	14.40	45.50

Rozsah použití

Teplota:	-40 °C ~ +200 °C
Tlak:	10 bar
Rychlost:	15 m/sec

Materiálové složení

Rotační plocha:	SS / TC
Stacionární plocha:	CA / TC
O-kroužky:	EPDM / Viton / FEP / Kalrez