


POWER[®] seal 1688

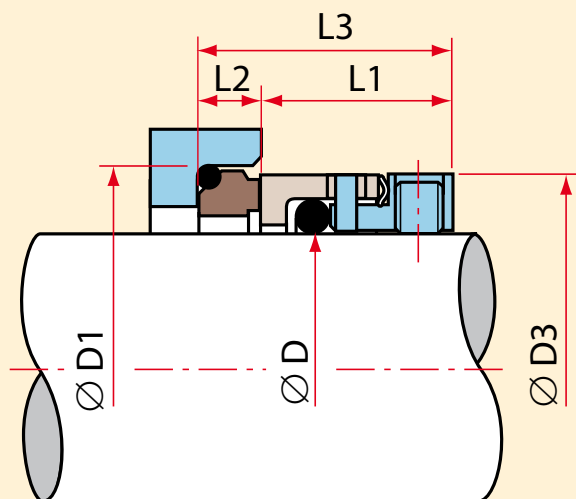

Rozsah použití

Teplota:	-40 °C ~ +200 °C
Tlak:	10 bar
Rychlost:	15 m/sec

Materiálové složení

Rotační plocha:	SS / TC
Stacionární plocha:	CA / SC / SiC / TC
O-kroužky:	EPDM / Viton / FEP / Kalrez

Ø hřídele D Inch	Ø hřídele D mm	D1	D3	L1	L2	L3
0.625	16	28.50	27.00	19.10	6.30	25.40
0.750		31.70	30.00	19.10	6.30	25.40
	24	35.40	34.10	19.10	7.60	26.70
	28	42.00	39.00	19.10	7.60	26.70
1.125		41.20	39.50	19.10	7.60	26.70
	30	42.70	41.00	19.10	7.60	26.70
1.250		44.40	42.40	19.10	7.60	26.70
	32	44.40	42.40	19.10	7.60	26.70
1.375	35	47.60	45.50	19.10	7.60	26.70
1.500	38	53.90	51.80	21.10	8.10	29.20
1.750		60.30	58.20	21.10	8.10	29.20
1.875		63.50	61.40	21.10	8.10	29.20
	50	63.90	61.90	21.10	8.10	29.20
2.000		66.60	64.60	22.10	9.60	31.70
2.125		73.00	71.00	22.10	9.60	31.70
	54	73.90	71.00	22.10	9.60	31.70
2.150	55	75.00	72.00	22.10	9.60	31.70
	63	83.00	79.30	25.80	9.10	34.90
2.500		88.90	79.30	25.80	9.10	34.90
2.750		95.20	90.80	25.80	9.10	34.90
2.875	73	98.40	94.00	25.80	9.10	34.90
	75	100.40	96.00	25.80	9.10	34.90
3.000		101.60	96.90	25.80	9.10	34.90
	80	104.00	101.00	25.80	9.10	34.90
	95	125.00	116.00	25.80	9.10	34.90
	100	130.00	121.00	25.80	9.10	34.90