


POWER[®] *seal* 1724

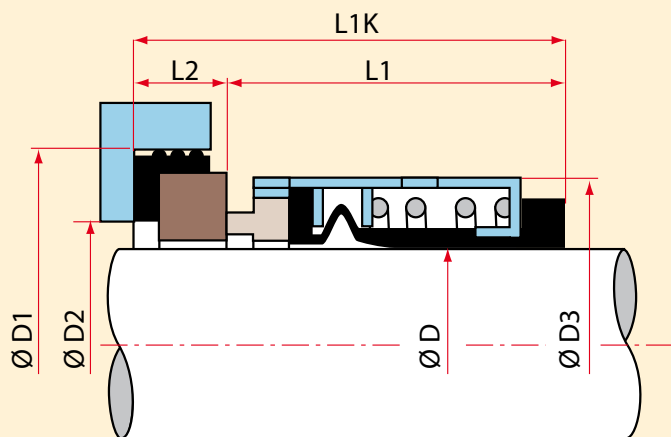

Rozsah použití

Teplota:	-40 °C ~ +200 °C
Tlak:	12 bar
Rychlost:	18 m/sec

Materiálové složení

Rotační plocha:	CA / SC / SiC / TC
Stacionární plocha:	CE / SC / SiC / TC
Elastomery:	EPDM / Viton / NBR

ø hřídele D mm	D1	D2	D3	L1	L2	L1K
14	25.00	21.00	24.00	26.40	8.60	35.00
16	27.00	23.00	26.00	26.40	8.60	35.00
18	33.00	27.00	32.00	27.50	10.00	37.50
20	35.00	29.00	34.00	27.50	10.00	37.50
22	37.00	31.00	36.00	27.50	10.00	37.50
24	39.00	33.00	38.00	30.00	10.00	40.00
25	40.00	34.00	39.00	30.00	10.00	40.00
28	43.00	37.00	42.00	32.50	10.00	42.50
30	45.00	39.00	44.00	32.50	10.00	42.50
32	48.00	42.00	46.00	32.50	10.00	42.50
33	48.0(5)	42.00	47.00	32.00	10.00	42.50
35	50.00	44.00	49.00	32.50	10.00	42.50
38	56.00	49.00	54.00	34.00	11.00	45.00
40	58.00	51.00	56.00	34.00	11.00	45.00
43	61.00	54.00	59.00	34.00	11.00	45.00
45	63.00	56.00	61.00	34.00	11.00	45.00
48	66.00	59.00	64.00	34.00	11.00	45.00
50	70.00	62.00	66.00	34.50	13.00	47.50
53	73.00	65.00	69.00	34.50	13.00	47.50
55	75.00	67.00	71.00	34.50	13.00	47.50
58	78.00	70.00	78.00	39.50	13.00	52.50
60	80.00	72.00	80.00	39.50	13.00	52.50
63	83.00	75.00	81.00	39.50	13.00	52.50
65	85.00	77.00	85.00	39.50	13.00	52.50
68	90.00	81.00	88.00	37.20	15.30	52.50
70	92.00	83.00	89.00	44.70	15.30	60.00
75	97.00	88.00	96.00	44.70	15.30	60.00
80	105.00	95.00	104.00	44.30	15.70	60.00
85	110.00	100.00	108.00	44.30	15.70	60.00
90	115.00	105.00	114.00	49.30	15.70	65.00
95	120.00	110.00	118.00	49.30	15.70	65.00
100	125.00	115.00	124.00	49.30	15.70	65.00