


# POWER<sup>®</sup> seal 192

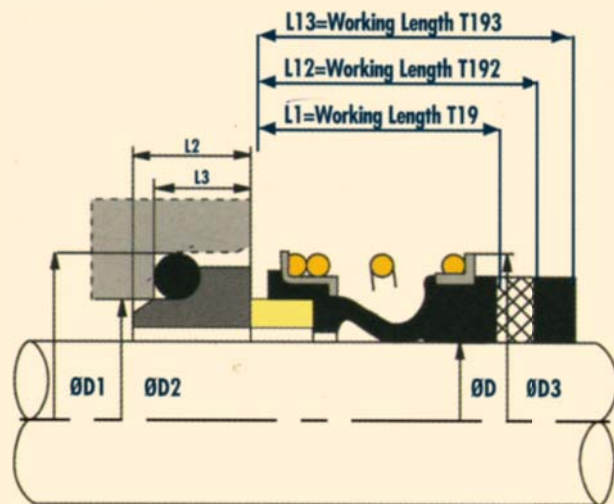

## Rozsah použití

Teplota: -40 °C ~ +200 °C

Tlak: 170 psi

Rychlost: 20 m/sec

## Materiálové složení

Rotační plocha: Carbon, Silicon Carbide, Tungsten Carbide

Stacionární plocha: Ceramic, Silicon Carbide, Tungsten Carbide

Ostatní materiály na vyžádání.

Ø hřídele D mm	D1	D2	D3	L1	L12	L13	L2	L3
10	19.2	15.5	20.0	14.5	25.9	33.4	9.0	6.6
12	21.6	17.5	24.0	15.0	25.9	33.4	8.0	5.6
14	24.6	20.5	28.0	17.0	28.4	33.4	8.0	5.6
15	24.6	20.5	28.0	17.0	28.4	33.4	9.0	6.6
16	28.0	22.0	28.0	17.0	28.4	33.4	10.0	7.5
18	30.0	24.0	31.0	19.5	30.0	37.5	10.5	8.0
20	35.0	29.5	36.0	21.5	30.0	37.5	10.0	7.5
22	35.0	29.5	36.0	21.5	30.0	37.5	10.0	7.5
24	38.0	32.0	40.5	22.5	32.5	42.5	10.0	7.5
25	38.0	32.0	41.0	23.0	32.5	42.5	10.0	7.5
28	42.0	36.0	47.0	26.5	35.0	42.5	11.5	9.0
30	45.0	39.2	47.0	26.5	35.0	42.5	13.0	10.5
32	48.0	44.2	51.0	27.5	35.0	47.5	13.0	10.5
33	50.0	42.2	51.0	27.5	35.0	47.5	13.5	11.0
35	52.0	46.2	55.0	28.5	35.0	47.5	13.5	11.0
38	55.0	49.2	58.0	30.0	36.0	46.0	13.0	10.3
40	58.0	52.2	60.0	30.0	36.0	46.0	13.5	10.8
43	62.0	53.3	63.0	30.0	36.0	51.0	14.5	12.0
45	64.0	55.3	65.0	30.0	36.0	51.0	14.5	11.6
48	68.4	59.7	69.0	30.5	36.0	51.0	14.5	11.6
50	69.3	60.8	71.0	30.5	38.0	50.5	14.5	11.6
53	72.3	63.8	76.0	33.0	36.5	59.0	15.0	12.3
55	75.4	66.5	78.0	35.0	36.5	59.0	16.0	13.3
58	78.4	69.5	82.0	37.0	41.5	59.0	16.0	13.3
60	80.4	71.5	85.0	38.0	41.5	59.0	16.0	13.3
65	85.4	76.5	90.0	40.0	41.5	69.0	16.0	13.0
68	91.5	82.7	94.0	40.0	41.5	68.7	16.0	13.7
70	92.0	83.0	97.0	40.0	48.7	68.7	16.0	13.0
75	99.0	90.2	102.0	40.0	48.0	68.7	17.0	14.0
80	104.0	95.2	108.0	40.0	48.0	78.0	18.0	15.0
85	109.0	100.2	117.0	41.0	46.0	76.0	18.0	14.8
90	114.0	105.2	126.0	45.0	51.0	76.0	18.0	14.8
95	120.3	111.6	131.0	46.0	51.0	76.0	19.0	15.8
100	123.3	114.5	131.0	47.0	51.0	76.0	19.0	15.8