


# POWER<sup>®</sup> *seal* 24

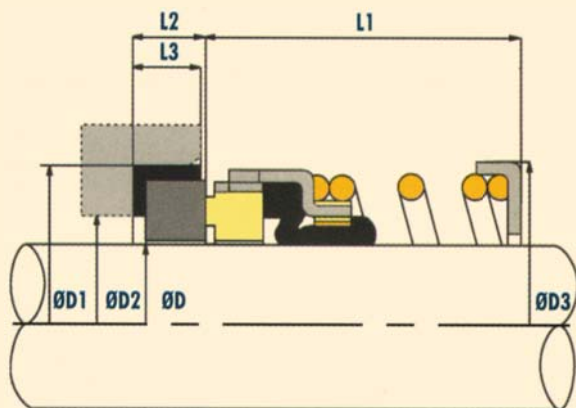

## Rozsah použití

Teplota: -40 °C ~ +200 °C

Tlak: 170 psi

Rychlost: 15 m/sec

## Materiálové složení

Rotační plocha: Carbon, Silicon Carbide, Tungsten Carbide

Stacionární plocha: Ceramic, Silicon Carbide, Tungsten Carbide

Ostatní materiály na vyžádání.

Ø hřídele D mm	D1	D2	D3	L1	L2	L3
12	23.00	19.00	21.70	23.90	8.60	5.50
14	25.00	21.00	23.90	26.40	8.60	5.50
16	27.00	23.00	26.70	26.40	8.60	5.50
18	33.00	27.00	30.40	27.50	10.00	7.00
20	35.00	29.00	33.40	27.50	10.00	7.00
22	37.00	31.00	33.40	27.50	10.00	7.00
24	39.00	33.00	38.00	30.00	10.00	7.00
25	40.00	34.00	39.30	30.00	10.00	7.00
28	43.00	37.00	42.00	32.50	10.00	7.00
30	45.00	39.00	43.95	32.50	10.00	7.00
32	48.00	42.00	45.80	32.50	10.00	7.00
33	48.00	42.00	45.80	32.50	10.00	7.00
35	50.00	44.00	49.00	32.50	10.00	7.00
38	56.00	49.00	52.80	34.00	11.00	8.00
40	58.00	51.00	55.80	34.00	11.00	8.00
43	61.00	54.00	58.80	34.00	11.00	8.00
45	63.00	56.00	61.00	34.00	11.00	8.00
48	66.00	59.00	64.00	34.00	11.00	8.00
50	70.00	62.00	66.00	34.50	13.00	8.50
53	73.00	65.00	70.65	34.50	13.00	8.50
55	75.00	67.00	71.65	34.50	13.00	8.50
58	78.00	70.00	78.40	39.50	13.00	8.50
60	80.00	72.00	78.40	39.50	13.00	8.50
63	83.00	75.00	81.50	39.50	13.00	8.50
65	85.00	77.00	84.30	39.50	13.00	8.50
68	90.00	81.00	89.65	37.20	15.30	9.50
70	92.00	83.00	89.65	37.20	15.30	9.50
75	97.00	88.00	96.80	44.70	15.30	9.50
80	105.00	95.00	104.00	44.30	15.70	10.00
85	110.00	100.00	107.95	44.30	15.70	10.00
90	115.00	105.00	111.10	49.30	15.70	10.00
95	120.00	110.00	119.00	49.30	15.70	10.00
100	125.00	115.00	124.00	49.30	15.70	10.00