


POWER[®] *seal* 60

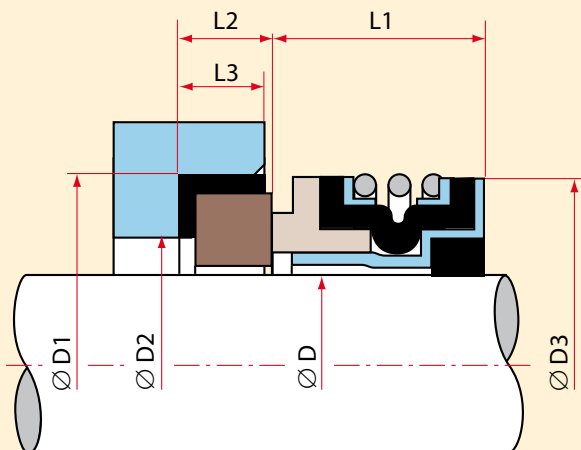

Ø hřídele D Inch	D1	D2	D3	L1	L2	L3
0.375	22.22	14.30	23.80	16.02	6.20	4.76
0.500	25.40	17.45	26.97	16.60	6.20	4.76
0.625	31.75	20.63	30.94	18.71	10.29	8.71
0.750	34.93	23.80	34.11	18.71	10.29	8.71
1.000	41.28	30.15	42.85	20.63	11.10	9.53


Rozsah použití

Teplota:	-40 °C ~ +200 °C
Tlak:	7 bar
Rychlost:	10 m/sec

Materiálové složení

Rotační plocha:	CA
Stacionární plocha:	SC / SiC / TC
Elastomery:	EPDM / Viton / NBR

POWER[®] *seal* 70

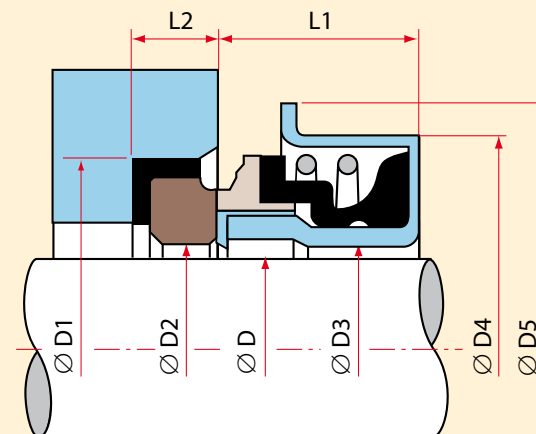

Ø hřídele D mm	D1	D2	D3	D4	D5	L1	L2
13	25.00	14.00	14.20	28.55	31.70	13.20	5.00
17	31.00	18.00	18.20	36.45	41.30	14.80	5.00
20	35.00	21.00	21.40	40.00	43.70	15.50	5.00
30	48.00	32.00	31.00	52.00	57.00	19.00	8.00

Rozsah použití

Teplota:	-40 °C ~ +200 °C
Tlak:	7 bar
Rychlost:	10 m/sec

Materiálové složení

Rotační plocha:	CA
Stacionární plocha:	SC / SiC
Elastomery:	EPDM / Viton / NBR