


# POWER<sup>®</sup> seal 8

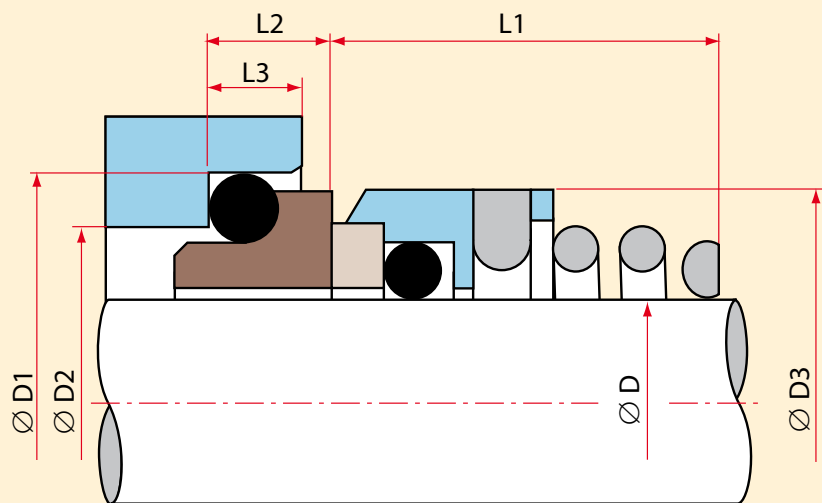

## Rozsah použití

Teplota: -40 °C ~ +180 °C

Tlak: 10 bar

Rychlost: 15 m/sec

## Materiálové složení

Rotační plocha: CA / SC / SiC / TC.

Stacionární plocha: CE / SC / SiC / TC.

Jiné materiálové provedení ploch na vyžádání

O-kroužky: EPDM / Viton / FEP / Kalrez

ø hřídele D mm	D1	D2	D3	L1	L2	L3
10	19.20	15.50	19.00	15.50	6.60	5.00
12	21.60	17.50	21.00	15.50	5.60	5.00
14	24.60	20.50	23.00	15.50	5.60	5.00
15	24.60	20.50	24.00	15.50	6.60	5.00
16	28.00	22.00	26.00	17.50	7.50	6.50
18	30.00	24.00	29.00	18.50	8.00	6.50
19	31.00	25.00	31.00	20.00	7.50	6.50
20	35.00	29.50	31.00	20.00	7.50	6.50
22	35.00	29.50	33.00	21.50	7.50	6.50
24	38.00	32.00	35.00	23.00	7.50	6.50
25	38.00	32.00	36.00	24.50	7.50	6.50
26	40.00	34.00	37.00	24.50	8.00	6.50
28	42.00	36.00	40.00	24.50	9.00	6.50
30	45.00	39.20	43.00	24.50	10.50	6.50
32	48.00	42.20	46.00	28.00	10.50	6.50
35	52.00	46.20	49.00	28.00	11.00	6.50
38	55.00	49.20	53.00	31.00	10.30	6.50
40	58.00	52.20	56.00	34.00	10.80	6.50
42	62.00	53.30	59.00	35.00	12.00	8.00
43	62.00	54.30	59.00	35.00	12.00	8.00
45	64.00	55.30	61.00	36.50	11.60	8.00
48	68.40	59.70	64.00	42.00	11.60	8.00
50	69.30	60.80	66.00	43.00	11.60	8.00
55	75.40	66.50	71.00	47.00	13.30	8.00
58	78.40	69.50	76.00	50.00	13.30	8.00
60	80.40	71.50	78.00	51.00	13.30	8.00
65	85.40	76.50	84.00	52.00	13.00	8.00
68	91.50	82.70	88.00	53.00	13.70	8.00
70	92.00	83.00	90.00	54.00	13.00	8.00
75	99.00	92.20	98.00	55.00	14.00	8.00
80	104.00	95.20	100.00	58.00	15.00	8.00