


# POWER<sup>®</sup> seal A1

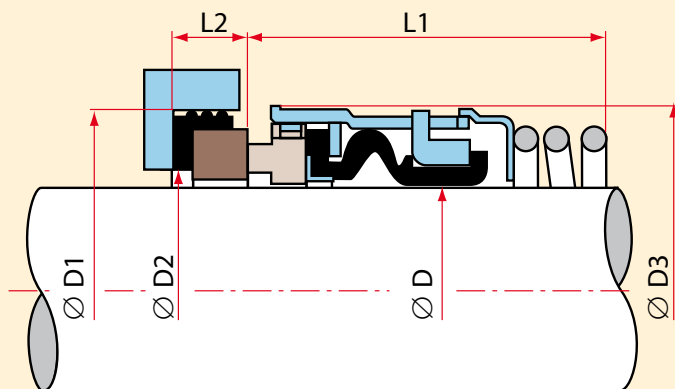

## Rozsah použití

Teplota: -40 °C ~ +200 °C

Tlak: 13 bar

Rychlost: 18 m/sec

## Materiálové složení

Rotační plocha: CA / SC / SiC / TC

Stacionární plocha: CE / SC / SiC / TC

Elastomery: EPDM / Viton / NBR

Ø hřídele D Inch	Ø hřídele D mm	D1	D2	D3	L1	L2
0.500	12	27.79	19.05	23.80	44.00	8.74
	14	30.95	22.23	27.76	44.00	10.32
0.625	16	30.95	22.23	27.76	44.00	10.32
	18	34.15	25.40	30.94	44.00	10.32
0.750	20	35.70	26.99	33.00	44.00	10.32
	22	37.30	28.58	34.11	44.00	10.32
0.875	24	40.50	31.75	38.10	44.00	10.32
	25	40.50	31.75	38.10	44.00	10.32
1.000	28	47.63	35.72	41.28	60.00	11.99
	30	50.80	38.89	46.02	60.00	11.99
1.250	32	50.80	38.89	46.02	60.00	11.99
	33	53.98	42.07	47.63	60.00	11.99
1.375	35	53.98	42.07	47.63	60.00	11.99
1.500	38	57.15	45.24	50.80	60.00	11.99
1.625	40	60.35	48.82	57.15	60.00	11.99
	43	63.50	51.59	60.33	71.00	11.99
1.750	45	63.50	51.59	62.50	71.00	11.99
1.875	48	66.70	54.75	65.50	71.00	11.99
2.000	50	69.85	58.00	66.68	71.00	13.50
2.125	53	73.05	62.00	71.42	71.00	13.50
2.250	55	76.20	65.00	74.60	71.00	13.50
2.375	60	79.40	68.00	77.77	71.00	13.50
2.500	63	82.55	71.20	80.95	71.00	13.50
2.625	65	92.10	78.35	85.73	71.00	15.90
2.750	70	95.25	81.10	88.90	70.00	15.90
2.875	73	98.45	84.50	92.08	73.00	15.90
3.000	75	101.65	88.10	95.25	73.00	15.90