


POWER[®] *seal* C 20

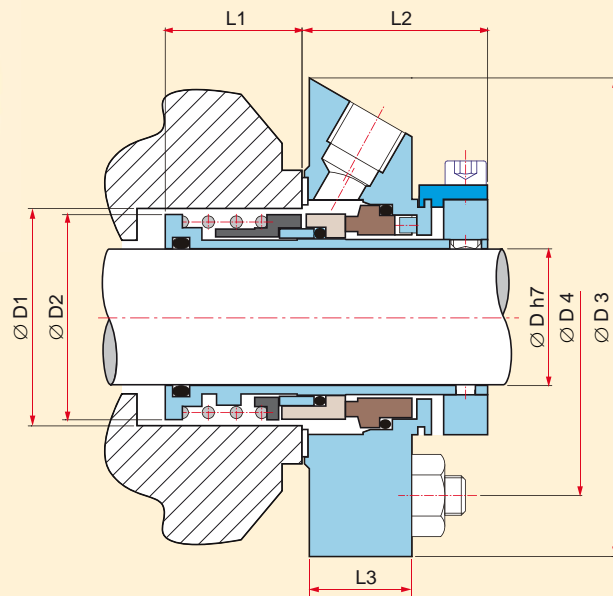

D	D2	D1	D4	D3	L3	L1	L2	PT
25	39	41.5	68	95	22.5	26.5	38	1/4"
28	42	44.5	73	95	22.5	28	38	1/4"
30	44	46	76	98	22.5	30	37.5	1/4"
32	46	48	76	108	23.5	31.5	38.5	1/4"
35	49	51	80	108	23.5	31.5	38.5	1/4"
38	55	58	86	120	23.5	31.5	38.5	1/4"
40	56	60	89	120	23.5	32	39	1/4"
45	61	64	92	127	23.5	34.5	39	1/4"
50	67	70	98	130	23.5	38	39	1/4"
55	72	75	105	150	24.5	39	43	1/4"
60	80	83	111	162	25.5	43	44	1/4"

Rozsah použití

Teplota: -40 °C ~ +90 °C

Tlak: 12 bar

Rychlost: 25 m/sec

Materiálové složení


Kovové části: SS 316L / Ti2 /
/ Hastelloy C

Stacionární plochy: SC / SiC / TC / CA

Rotační plochy: SC / SiC / TC

O-kroužky: EPDM / Viton / FEP /
/ Kalrez

POWER[®] *seal* CD 40A

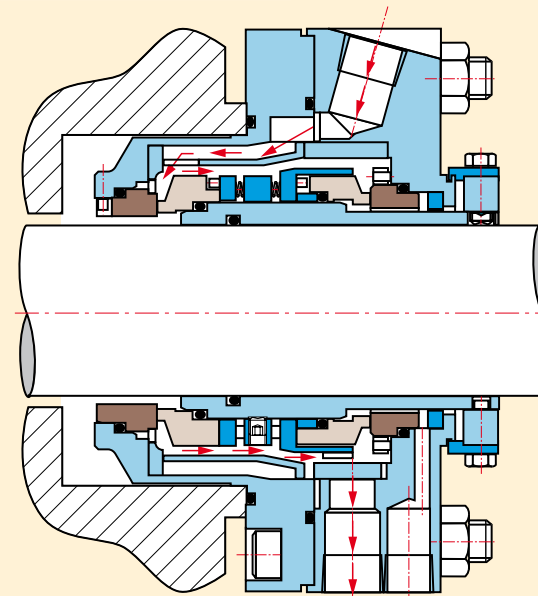

Rozsah použití

Teplota: -40 °C ~ +230 °C

Tlak: 0 ~ 30 bar

Rychlost: 25 m/sec

Materiálové složení

Kovové části: SS 316L / Ti2 / Hastelloy C

Stacionární plochy: SC / SiC / TC / CA

Rotační plochy: SC / SiC / TC

O-kroužky: EPDM / Viton / FEP / Kalrez