


POWER[®] seal CD 10

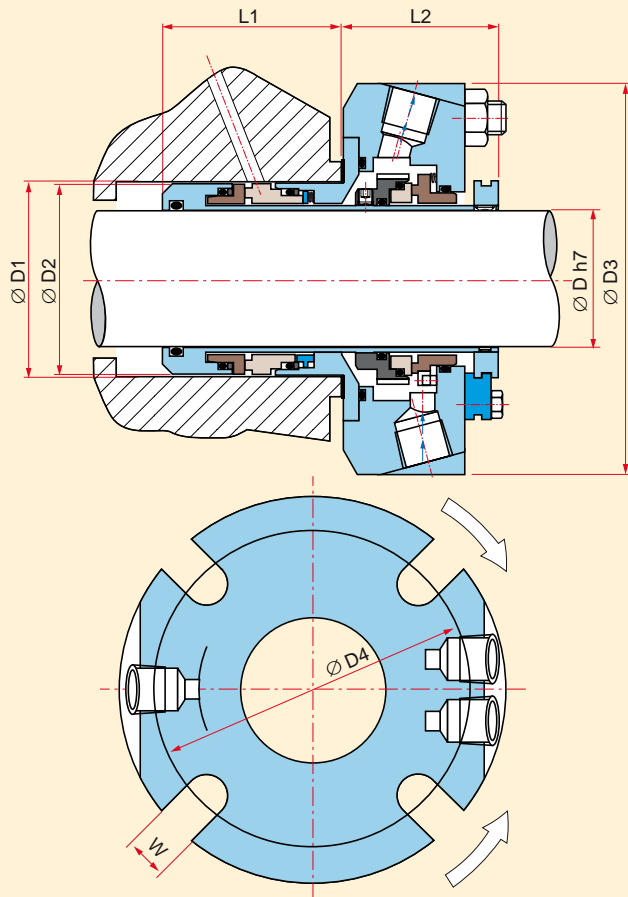

ø hřídele D		Ucpávková komora D1				D2	D3	L1	L2	I3	W												
Inch	mm	Min.	Max.									3/8"	M10	1/2"	M12	5/8"	M16						
1.000	25	1.625	41.5	1.875	48	1.551	39.4	3.740	95	1.850	47	1.850	47	1.417	36	0.437	11.1	2.625	70				
1.125	28	1.750	44.5	2.000	51	1.696	43.1	3.858	98	1.850	47.5	1.850	47	1.471	36.5	0.437	11.1	2.875	73				
	30		46		54		44.3		104		48		51.5		40.7		11.1		76				
1.250	32	1.875	48	2.125	54	1.811	46	4.252	108	1.850	47.5	2.007	51.5	1.574	40.7	0.437	11.1	3.000	76				
1.375	35	2.000	51	2.250	58	1.937	49.2	4.252	108	1.850	47.5	2.007	51.5	1.574	40	0.437	11.1	3.250	80				
1.500	38	2.250	58	2.500	63	2.185	55.5	4.724	120	1.929	48	2.007	51.6	1.574	40	0.563	14.3	3.375	86				
	40		60		66		58		120		49		51.6		40		14.3		88			90	
1.625		2.375		2.625		2.311	58.3	4.724	120	1.929	48	2.007	51.6	1.574	40	0.563		3.500			3.625		
	42		62		68		60		120		49		51		40		14.3		90			92	
1.750	45	2.500	64	2.750	70	2.437	61.9	5.000	127	2.283	54	2.007	51	1.574	40	0.563	14.3	3.625	93	3.750	96		
1.875	48	2.625	67	2.875	73	2.562	65.1	5.118	127	2.283	54	2.007	51	1.574	40	0.563	14.3	3.750	95	3.875	98		
2.000	50	2.750	70	3.000	77	2.685	68.2	5.118	127	2.283	58	2.007	51	1.574	40	0.563	14.3	3.875	98	4.000	102		
2.125		2.875		3.125		2.811	71.4	5.906	150	2.283	51	2.007	59	1.574		0.689		4.125			4.250		4.375
	55		75		82		73		155		51		59		48		17.5		105			108	112
2.250		3.000		3.250		2.937	74.6	6.260	159	2.283	58	2.007	51	1.574	40	0.689		4.250			4.375		4.500
2.375	60	3.250	83	3.500	90	3.185	79.8	6.378	162	2.283	59.5	2.283	58.5	1.870	48	0.689	17.5	4.375	112	4.500	115	4.625	118
2.500	63	3.375	86	3.625	92	3.311	83	6.496	165	2.283	59.5	2.283	58.5	1.870	48	0.689	17.5	4.500	115	4.625	118	4.750	121
2.625	65	3.500	90	3.750	95	3.437	87.3	7.008	165	2.283	58	2.283	58.5	1.870	48	0.689	17.5	4.625	118	4.750	121	4.875	124
2.750	70	3.750	95	4.062	102	3.626	92.1	7.756	178	2.283	58	2.283	60	1.870	48	0.689	17.5	4.750	121	4.875	124	5.000	127
2.875		4.000		4.312		3.877					2.637		2.637		2.047								
3.000	75	4.000	104	4.312	108	3.874	98.4			2.637	67	2.637	67	2.047	52								
3.125	80	4.250	109	4.562	115	4.125	105			2.637	67	2.637	67	2.047	52								
3.250		4.375		4.687		4.125	105		190	2.637	67	2.637	67	2.047	53.2								
3.375	85	4.500	114	4.812	122	4.375	111		190	2.637	67	2.755	70	2.047	56								
3.500	90	4.625	119	4.937	127	4.500	114.3			2.637	67	2.755	70	2.047	52								
3.625		4.750		5.062		4.625				2.637		2.755		2.047									
3.750	95	4.875	124	5.187	132	4.625	118		218	2.637	69	2.755	72.5	2.047	59								
3.875		5.000		5.312		4.875				2.637		2.755		2.047									

Velikosti nad průměr 70mm jsou dodávány na dotaz

Rozsah použití

Teplota:	-40 °C ~ +230 °C
Tlak:	25 bar
Rychlost:	25 m/sec

Materiálové složení

Kovové části:	SS 316L / Ti2 / Hastelloy C
Stacionární plochy:	SC / SiC / TC / CA
Rotační plochy:	SC / SiC / TC
O-kroužky:	EPDM / Viton / FEP / Kalrez