


POWER[®] *seal* S 40U

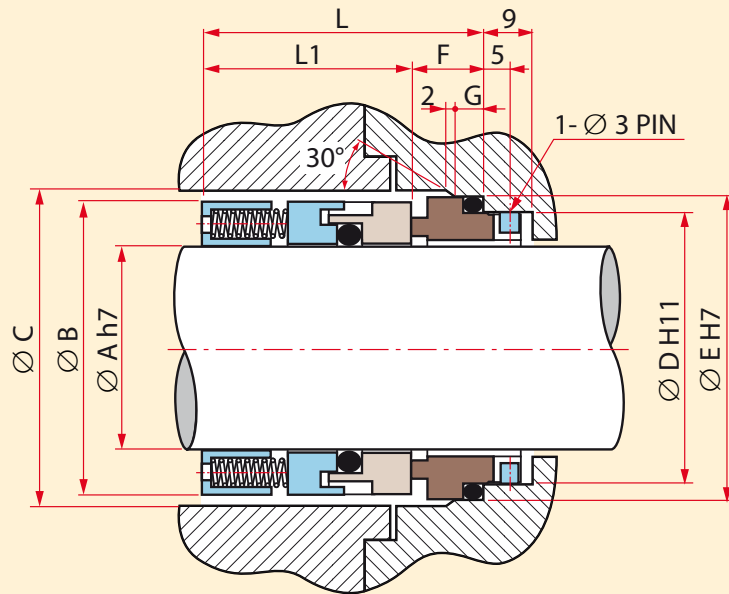

Rozsah použití

Teplota: -40 °C ~ +200 °C

Tlak: 12 bar

Rychlost: 25 m/sec

Materiálové složení

Kovové části: SS 316L / Hastelloy C / Ti2

Stacionární plocha: CA / SC / SiC / TC

Rotační plocha: SC / SiC / TC

O-kroužky: EPDM / Viton / FEP / Kalrez

A	B	C	D	E	L	L1	F	G
20	34	36	29	35	48	35	13	5
22	36	38	31	37	48	35	13	5
24	38	40	33	39	48	35	13	5
25	39	41	34	40	48	35	13	5
28	42	44	37	43	48	35	13	5
30	44	46	39	45	48	35	13	5
32	46	48	42	48	48	35	13	5
33	47	49	42	48	48	35	13	5
35	49	51	44	50	48	35	13	5
38	54	58	64	63	51	38	13	5
40	56	60	52	58	51	38	13	5
43	59	63	55	61	51	38	13	5
45	61	65	57	63	51	38	13	5
48	64	68	60	66	51	38	13	5
50	66	70	62	68	52	39	13	5
53	69	73	65	71	53	40	13	5
55	71	75	67	73	53	40	13	5
58	76	83	70	79	57	41	16	7
60	78	85	72	81	57	41	16	7
63	81	88	75	84	57	41	16	7
65	83	90	77	86	57	41	16	7
68	86	93	81	90	57	41	16	7
70	90	95	83	92	58	42	16	7
75	95	104	88	97	58	42	16	7
80	100	109	96	105	58	42	16	7
85	105	114	101	110	59	43	16	7
90	110	119	106	115	61	45	16	7
95	115	124	111	120	61	45	16	7
100	120	129	116	125	61	45	16	7