


POWER[®] seal S 80U

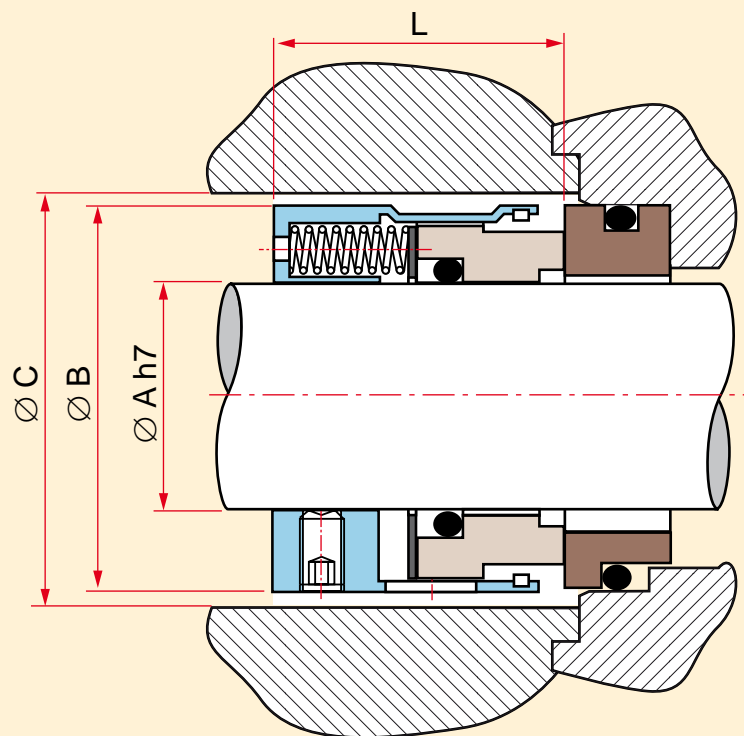

A		B		C		L	
Inch	mm	Inch	mm	Inch	mm	Inch	mm
1.000	25.400	1.437	36.5	1.562	39.74	1.000	25.4
1.125	28.575	1.562	39.6	1.687	42.84	1.000	25.4
1.250	31.750	1.687	42.8	1.182	46.02	1.000	25.4
1.375	34.925	1.937	49.2	2.062	52.37	1.125	28.6
1.500	38.100	1.937	49.2	2.062	52.37	1.125	28.6
1.625	41.275	2.250	51.1	2.375	63.32	1.156	29.4
1.750	44.450	2.312	58.7	2.437	61.90	1.375	34.9
1.875	47.625	2.500	63.5	2.625	66.67	1.375	34.9
2.000	50.800	2.625	66.6	2.750	69.85	1.375	34.9
2.125	53.975	2.812	71.4	2.937	74.60	1.687	42.8
2.250	57.150	2.843	72.2	2.968	75.38	1.687	42.8
2.375	60.325	3.000	76.2	3.125	79.37	1.687	42.8
2.500	63.500	3.125	79.4	3.250	82.55	1.687	42.8
2.625	66.675	3.250	82.5	3.375	85.72	1.687	42.8
2.750	69.850	3.375	85.7	3.500	88.90	1.687	42.8
2.875	73.025	3.500	88.9	3.625	92.00	1.687	42.8
3.000	76.200	3.625	92.0	3.750	95.25	1.687	42.8
3.125	79.375	3.750	95.2	3.875	98.43	1.687	42.8
3.250	82.550	3.875	98.4	4.000	101.60	1.687	42.8
3.375	85.725	4.000	101.6	4.125	104.78	1.687	42.8
3.500	88.900	4.125	104.8	4.250	108.00	1.687	42.8
3.625	92.075	4.250	108	4.375	111.12	1.687	42.8
3.750	95.250	4.375	111.1	4.500	114.30	1.687	42.8
3.875	98.425	4.500	114.3	4.625	117.47	1.687	42.8
4.000	101.60	4.625	117.5	4.750	120.65	1.687	42.8

Rozsah použití

Teplota:	-40 °C ~ +200 °C
Tlak:	12 bar
Rychlost:	25 m/sec

Materiálové složení

Kovové části:	SS 316L / Hastelloy C / Ti2
Rotační plocha:	CA / SC / SiC / TC
O-kroužky:	EPDM / Viton / FEP / Kalrez